



Rubberdex® Screen Panels

Rubberdex's resilience and durability make it the best choice for applications where gouging and abrasion are prevalent.

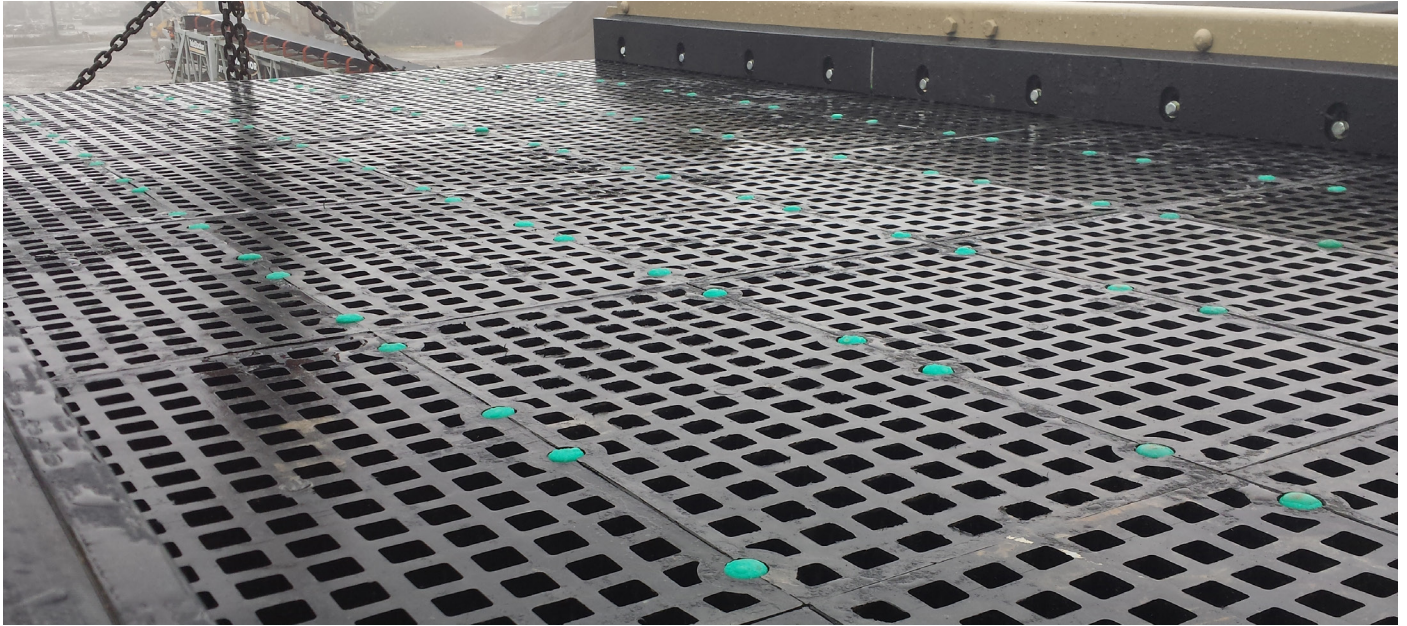

Benefits

- Durability and strength due to panel thickness and material options.
- Polydeck's injection molding process provides the most consistent quality in the industry.
- Reduces noise levels by as much as 10 decibels when replacing steel media.
- Best open area in the industry when combined with our Maxi and DMax designs.

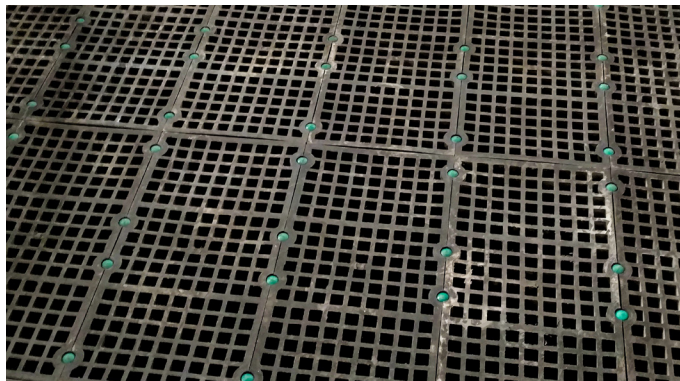

Options

- Panels are 1' X 2' with thicknesses from 30mm to 100mm.
- Square, slotted, VR (zigzag), SVR (slotted zigzag), HVR and round openings.
- Rubber materials can be PD40 "flexi" for fine sizing applications with sticky fines, PD65 (standard rubber compound), PD60, PD60HT (used in high temperatures), PD80 or XLR.
- Integrated skid bars and 1" and 2" dams.

